

PUMP OUT INSTRUCTIONS

Please contact the Harbor Office if you have any concerns about using the pump-out or to report an equipment problem.

(360) 647-6176 Office
(360) 303-7110 Security.

To Empty Boat:

1. Take pump-out cart to boat and **SET THE BRAKES ON THE WHEELS.**
2. Plug cart into 30 amp shore-power receptacle.
3. Put nozzle in the holding tank deck port and **OPEN** colored valve handle (*FIG. A).
4. Turn switch to **FILL** position (*FIG. B).
5. Holding the nozzle in the deck port, pump out the holding tank.
6. When you are finished emptying the holding tank, turn the switch to **OFF** and **CLOSE** colored valve handle.

To Empty Cart:

1. Take cart to discharge station(*FIG. C)
2. **REMOVE** rubber nipple from nozzle and attach to the discharge fitting.
3. **OPEN** colored valve handle (Note: it is very important to open the valve before turning the cart on. Failure to do so will cause the hose to rupture under pressure.)
4. Plug in cart.
5. **TURN** and **HOLD** switch on cart to empty position.
6. Please return cart to enclosure when you are finished.

***See Back**

Figure A (Nozzle valve with colored handle.)



Figure B (Cart controls)

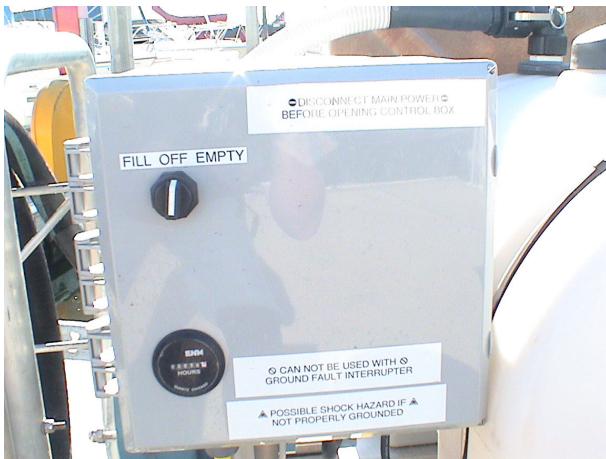


Figure C (Discharge station)

